


## DECLARATION

I, Hyung Nam KIM, Patent Attorney, hereby declare the following:

I am knowledgeable in Korean and English. I have reviewed Korean Patent Application No. 10-2003-0006937 and believe the attached document to be an accurate translation thereof.

All statements made herein of my own knowledge are true and all statements made on information and belief are believed to be true. Further, these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

January 12, 2009



Date & Signature: Hyung Nam KIM

KR10-2003-0006937

**ABSTRACT****Summary**

Disclosed is an apparatus and method for determining the type of an optical disk so as to implement an optimal servo operation according to the type of a loaded optical disk. In the method, the level of a wobble extraction signal is detected while a focusing servo is turned on, and the type of the loaded optical disk is determined based on the detected signal level, and then a tracking servo adjustment operation is performed according to the determined optical disk type. Accordingly, optical disk reproduction and/or recording characteristics are improved by performing an optimal tracking servo adjustment operation according to the determined optical disk type. Further, if the type of the loaded optical disk is read-only, there is no time loss, thus allowing a swift reproduction operation, since unnecessary operations such as recording mode adjustment and gain adjustment of a digital recording signal processor are omitted.

**Key Figure**

Figure 3

**Key Words**

ATFM, wobble signal, tracking servo, focusing servo, counter, spindle motor

FEB 05 2009

KR10-2003-0006937

**SPECIFICATION****Title**

AN APPARATUS AND METHOD FOR DISCRIMINATING TYPE OF OPTICAL DISC

**Brief Description Of The Drawings**

Fig. 1 is a flowchart showing an example of a method for determining the type of an optical disc employed in a conventional optical disk device;

Fig. 2 is a block diagram showing the configuration of an optical disk device in which an apparatus for determining the type of an optical disk according to the present invention is embodied;

Fig. 3 is a flowchart showing a method for determining the type of an optical disk according to a preferred embodiment of the present invention; and

Figs. 4 and 5 show examples of tracking error signals and ATFM signals according to the type of the optical disk.

**Major Elements In Drawings**

10 : optical disc	11 : spindle motor
12 : couter	20 : optical pickup
30a : digital recording signal processor	
30b : digital reproduction signal processor	
40 : channel bit encoder	41 : optical drive
50 : R/F unit	51 : level detector
60 : drive unit	61 : servo unit
70 : microcomputer	

KR10-2003-0006937

**Background Of The Invention**

The present invention relates to an apparatus and method for determining the type of an optical disk in order to implement an optimal servo operation according to the type of a loaded optical disk.

Fig. 1 is a flowchart showing an example of a method for determining the type of an optical disc employed in a conventional optical disk device. The conventional method for determining the type of an optical disk will now be described with reference to Fig. 1.

In the prior art, when an optical disk is loaded, it is determined, from an FG signal detected as a spindle motor rotates, whether the optical disk is loaded and whether the loaded disk is 8 or 12 cm in size (S1), and it is also determined whether it is a CD-RW (S2). This determination may be based on the reflectivity of the optical disk when an objective lens is moving in a direction perpendicular to the disk surface while an internal laser diode LD in an optical pickup is turned on.

After such disk discrimination has been performed, the optical disk device turns a focusing servo on after adjusting the focusing gain and the offset of an R/F IC according to the disk discrimination result (S3). Then, the optical disk device turns a tracking servo on after adjusting the tracking gain (S4).

Next, the optical disk device shifts to a recording mode and performs a corresponding adjustment operation, and also performs an automatic focusing/tracking gain adjustment operation of both a digital recording signal processor and a

KR10-2003-0006937

digital reproduction signal processor, and a gain adjustment operation of the R/F unit (S5 and S6).

If it is determined that the loaded optical disk is not a CD-RW (S6), the optical disk device determines whether it is CD-R or CD-ROM. The optical disk device turns a wobble servo on for reading ATIP (Absolute Time In Pre-groove) signals after the focusing and tracking gain adjustment operation and the recording mode adjustment operation have been performed, and checks whether an ATIP signal is detected within a predetermined time, so as to determine whether the optical disk is a CD-R or CD-ROM (S7). If an ATIP signal is detected within the predetermined time, the optical disk device determines the optical disk to be a CD-R (S8). On the contrary, if no ATIP signal is detected within the predetermined time, the optical disk device determines the optical disk to be a CD-ROM (S9). When such disk discrimination has been completed, the optical disk device performs a requested operation (S10).

In the prior art, as described above, the determination as to whether the loaded optical disk is a CD-R or CD-ROM is performed after the focusing and tracking servo adjustment has been completed.

However, the conventional optical disk device (for example, a CD-RW drive) generally employs the same tracking servo scheme, i.e., a push-pull tracking servo scheme having a high optical efficiency, irrespective of the type of a loaded optical disk, although it is required to employ an optimal tracking servo scheme according to the type of the optical disk in order to improve the reproduction characteristics. The conventional device thus has a problem in that the reproduction and/or recording characteristics are degraded for CD-R and CD-ROM disks.

KR10-2003-0006937

In addition, the conventional device performs the recording mode adjustment operation and the automatic focusing/tracking gain adjustment operation of the digital recording signal processor, as described above, before determining whether the optical disk is a CD-R or CD-ROM. For this reason, if the loaded optical disk is a CD-ROM, i.e., a read-only disk, the reproduction operation is delayed since the unnecessary adjustment operation is performed.

#### Explanation Of The Invention

Therefore, the present invention has been made in view of the above problems, and it is an object of the present invention to provide an apparatus and method for determining the type of an optical disk, wherein optical disk reproduction and/or recording characteristics are improved by performing an optimal tracking servo adjustment operation according to the type of a loaded optical disk, and in the case where the type of the loaded optical disk is read-only, there is no time loss such as reproduction delay by omitting an unnecessary operation such as a recording mode adjustment.

In accordance with one aspect of the present invention, the above and other objects can be accomplished by the provision of a method for determining the type of an optical disk, comprising the steps of: a) detecting a level of a wobble extraction signal while a focusing servo is turned on; b) determining a type of a loaded optical disk based on the detected signal level; and c) performing a tracking servo adjustment operation according to the determined optical disk type.

In accordance with another aspect of the present invention, there is provided an apparatus for determining the type of an optical disk, comprising: a servo means for performing a focusing

KR10-2003-0006937

and tracking servo adjustment operation on an optical pickup means; a level detection means for detecting a level of a wobble extraction signal produced from the optical pickup means while a focusing servo in the servo means is turned on; a determination means for determine the type of the optical disc based on the detected signal level; and a control means for controlling the servo means to perform a tracking gain adjustment and a tracking servo adjustment operation according to the determined result.

An apparatus and method for determining the type of an optical disk according to preferred embodiments of the present invention will now be described in detail with reference to the annexed drawings.

Fig. 2 is a block diagram showing the configuration of a preferred embodiment of an optical disk device in which an apparatus for determining the type of an optical disk according to the present invention is embodied.

As shown in this figure, the optical disk device includes a channel bit encoder 40, an optical drive 41 and a digital recording signal processor 30a for recording data.

In addition, the optical disk device includes a counter 12, an optical pickup 20, an R/F unit 50, an ATFM signal level detector 51, a spindle motor 11 for rotating an optical disk 10, a drive unit 60 for driving an optical pickup 20, a servo unit 61, and a digital reproduction signal processor 30b. The counter 12 counts pulses (FG signals) produced as the spindle motor 11 rotates. The optical pickup 20 records data on the optical disk 10 and reads data from a recording layer thereof according to an inputted optical drive signal. The R/F unit 50 performs filtering and waveform shaping on a signal detected by the optical pickup 20 to output it as a binary signal, and outputs an ATFM signal, as a wobble extraction signal, through an ATFM terminal. The ATFM signal level detector 51 detects the level of the ATFM signal outputted

**KR10-2003-0006937**

from the R/F unit 50. The servo unit 61 controls the operation of the drive unit 60 based on both a servo error signal (a focusing error signal and a tracking error signal) outputted from the optical pickup 20 and a signal associated with the rotation speed of the optical disk 10. The digital reproduction signal processor 30b recovers original data from the binary signal with a clock synchronized in phase with the binary signal.

The optical disk device further includes a microcomputer 70 that determines the type of a loaded optical disk 10 based on the detected level of the ATFM signal, and controls a focusing and tracking servo operation, a gain adjustment operation, a recording mode adjustment operation, etc., according to the determined result.

Fig. 3 is a flowchart showing a method for determining the type of an optical disk according to a preferred embodiment of the present invention. This determination method of Fig. 3 will now be described in detail with reference to the device configuration shown in Fig. 2.

If an optical disk 10 is loaded, the microcomputer 70 performs scheduled initial operations such as disk discrimination and servo adjustment.

First, the microcomputer 70 rotates the spindle motor 11 through the servo unit 61 and the drive unit 60. The counter 12 counts pulses (FG signals) outputted from the spindle motor 11, and inputs the count value to the microcomputer 70.

The microcomputer 70 determines whether an optical disk is loaded and whether the loaded optical disk is 8 or 12 cm in size, based on the count value (S11). The reason why this determination is based on the count value is because the count value during one rotation of the optical disk 10 varies depending on both whether the optical disk 10 is loaded and whether the optical disk is 8 or 12 cm in size (S11).

The microcomputer 70 also determines whether the type of the loaded optical disk 10 is CD-RW or not (S12). To this end, the



**KR10-2003-0006937**

microcomputer 70 detects the reflectivity of the optical disk when an objective lens is moving in a direction perpendicular to the disk surface while an internal laser diode LD in the optical pickup 20 is turned on. For example, upon the assumption that the reflectivity of a normal disk is 100%, the microcomputer 70 determines that the optical disk 10 is a CD-RW if the detected reflectivity thereof is 30%.

After such disk discrimination has been performed, the microcomputer 70 optimally adjusts the focusing gain and the offset of the R/F unit 70 on the basis of the discrimination result, as described above, while controlling the position of an objective lens provided in an actuator of the optical pickup 20 to turn on the focusing servo (S13).

While the focusing servo is turned on, the level detector 51 detects the level of an ATFM (Absolute Time Frequency Modulator) signal (wobble extraction signal) outputted through the ATFM terminal of the R/F unit 50.

The ATFM signal is obtained by combining A, B, C and D signals of the optical pickup 20, which is produced to detect a wobble signal of a disk for recording such as a CD-R, and slice it to obtain an ATIP (Absolute Time In Pre-groove) signal. Since the ATFM signal used in the present invention is measured before performing the tracking servo adjustment, it is difficult to correctly produce the ATIP signal as a wobble signal, but since the level thereof can be measured, it is possible to determine whether there is a wobble.

If the determination result at step S11 is that the optical disk 10 is not a CD-RW (S20), the microcomputer 70 again determines the type of the optical disk, based on the detected level of the ATFM signal (S21). If the detected (peak-to-peak) level of the ATFM signal is about 250 ~ 350 mV as illustrated in Fig. 4, the microcomputer 70 determines the optical disk 10 to be a CD-ROM. On the other hand, if the detected ATFM signal level is about 950 ~

**KR10-2003-0006937**

1100 mV as illustrated in Fig. 5, the microcomputer 70 determines the optical disk 10 to be a CD-R (S30).

If the optical disk 10 is determined to be a CD-R, the microcomputer 70 performs two operations in sequence, the first being an optimal tracking gain adjustment according to the determined type of the optical disk 10 and the second causing the tracking servo to be turned on (S31). After the tracking servo is turned on, the microcomputer 70 shifts to a recording mode and performs a corresponding adjustment operation as described above, and also performs an automatic focusing/tracking gain adjustment operation of both the digital recording signal processor 30a and the digital reproduction signal processor 30b, and a gain adjustment operation of the R/F unit 50 (S32 and S33).

If the optical disk 10 is determined to be a CD-ROM (S40), the microcomputer 70 performs the tracking gain adjustment operation and turns the tracking servo on (S41), and then performs the automatic focusing/tracking gain adjustment operation of the digital reproduction signal processor 30b and the gain adjustment operation of the R/F unit 50 as described above, without shifting to the recording mode and performing a corresponding adjustment operation.

When the optimal servo adjustment and the recording mode adjustment according to the determined type of the optical disk 10 have been completed in such a manner, the microcomputer 70 performs a requested operation (recording or reproduction operation) for the optical disk 10 (S34).

The reason why the present invention determines the type of the optical disk 10 based on the ATFM signal as a wobble extraction signal as in the above embodiment, instead of based on the wobble signal as in the prior art, is because it is impossible to detect the wobble signal as only the focusing servo is currently turned on. In addition, since the ATFM signal level of a CD-R is higher than that of a CD-ROM in which there is no wobble signal, it is possible

**KR10-2003-0006937**

to easily determine whether the type of a loaded optical disk 10 is CD-R or CD-ROM, based on the ATFM signal level.

Moreover, a 3-beam or DPD tracking servo scheme is suitable for a CD-ROM and a DVD-ROM as a usually printed disk, whereas a DPP tracking servo scheme is suitable for a CD-R/RW and DVD-R/RW. Accordingly, if it is determined whether the type of the disk is R (a disk for recording) or ROM (a printed disk) before the tracking adjustment is performed, the device operation is switched to a tracking servo scheme suitable for the determined disk type, so that it is employed in the corresponding operation. It is thus preferable to select the tracking scheme at step S31 or S41.

Although the preferred embodiments of the present invention have been disclosed for illustrative purposes, those skilled in the art will appreciate that various modifications, additions and substitutions are possible, without departing from the scope and spirit of the invention as disclosed in the accompanying claims.

#### Effect Of The Invention

As apparent from the above description, an apparatus and method for determining the type of an optical disk according to the present invention has the following advantages. Optical disk reproduction and/or recording characteristics are improved by performing an optimal tracking servo adjustment operation according to the type of a loaded optical disk. In addition, in the case where the type of the loaded optical disk is read-only, there is no time loss, thus allowing a swift reproduction operation, since unnecessary operations such as a recording mode adjustment operation and a gain adjustment operation of a digital recording signal processor are omitted.

**WHAT IS CLAIMED IS:**

KR10-2003-0006937

1. A method for determining the type of an optical disk, comprising the steps of:

a) detecting a level of a wobble extraction signal while a focusing servo is turned on;

b) determining a type of a loaded optical disk based on the detected signal level; and

c) performing a tracking servo adjustment operation according to the determined optical disk type.

2. The method according to claim 1, wherein the detected level of the wobble extraction signal for a disk for recording is higher than that of a disk for reproducing.

3. The method according to claim 2, further comprising the step of:

d) performing an adjustment operation in a recording mode when the determined optical disk type is a recordable disk type.

4. The method according to claim 1, wherein said step c) includes the steps of:

c-1) selecting a tracking servo scheme according to the determined optical disk type.

5. The method according to claim 4, wherein the selected tracking servo scheme is a 3-beam or DPD scheme for a disk for reproducing, and a DPP scheme for a disk for recording.

6. An apparatus for determining the type of an optical disk, comprising:

a servo means for performing a focusing and tracking servo adjustment operation on an optical pickup means;

a level detection means for detecting a level of a

**KR10-2003-0006937**

wobble extraction signal produced from the optical pickup means while a focusing servo in the servo means is turned on;

a determination means for determine the type of the optical disc based on the detected signal level; and

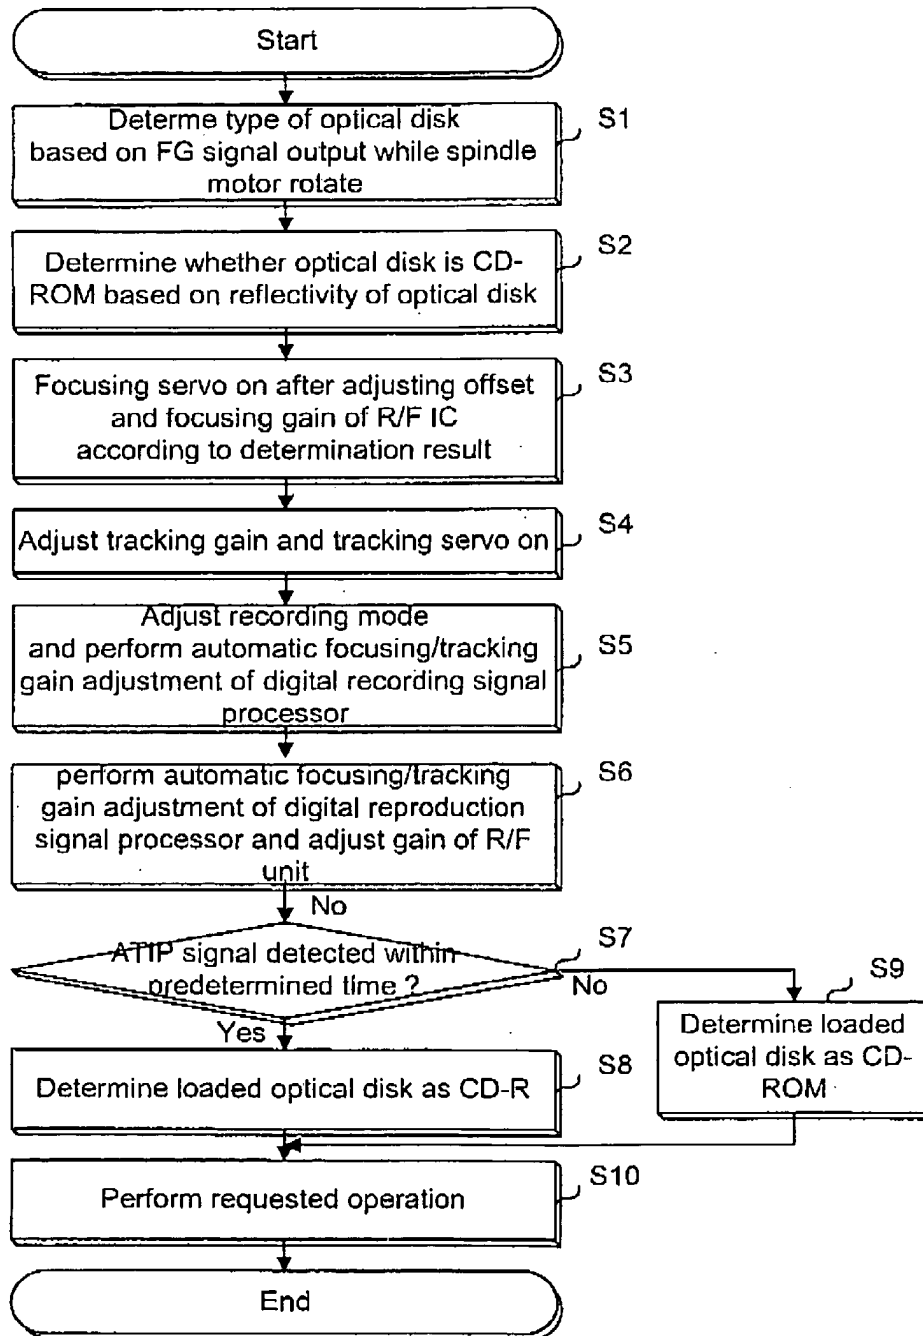
a control means for controlling the servo means to perform a tracking gain adjustment and a tracking servo adjustment operation according to the determined result.

7. The apparatus according to claim 6, wherein the control means performs an adjustment operation in a recording mode when the determined optical disk type is a recordable disk type.

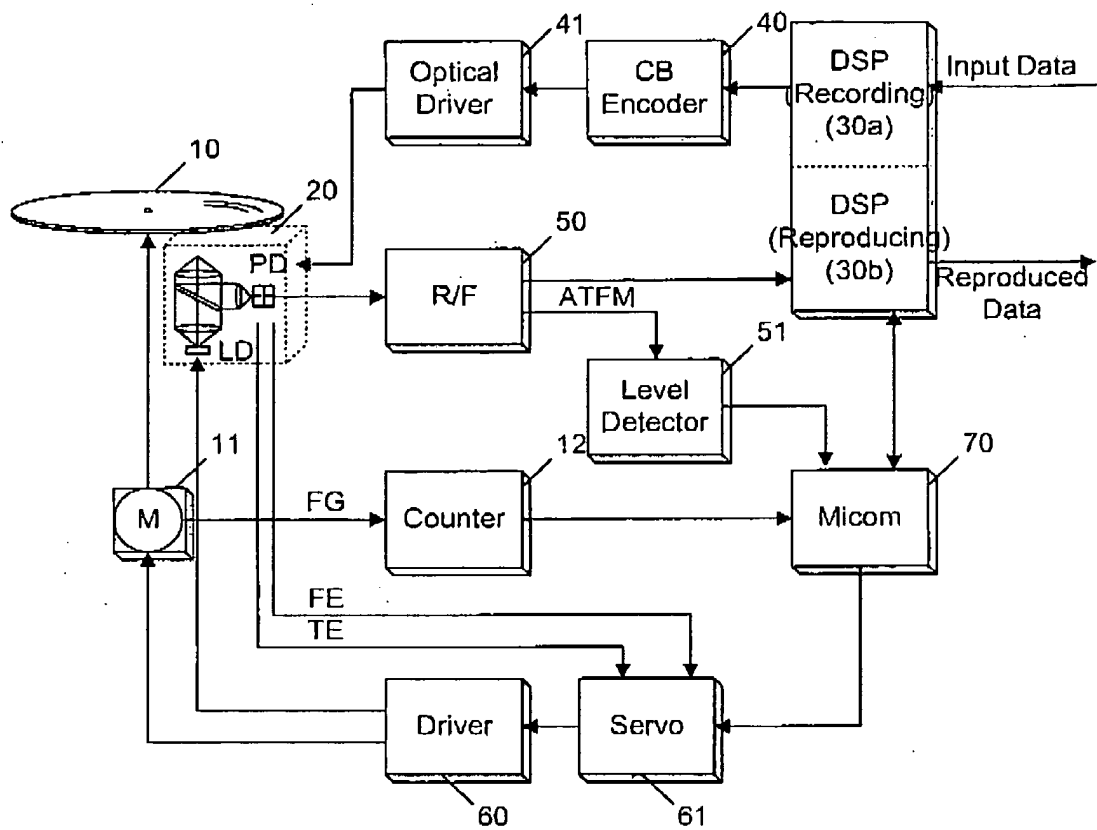
8. The apparatus according to claim 6, wherein the control means selects a tracking servo scheme according to the determined optical disk type.

9. The apparatus according to claim 8, wherein the selected tracking servo scheme is a 3-beam or DPD scheme for a disk for reproducing, and a DPP scheme for a disk for recording.

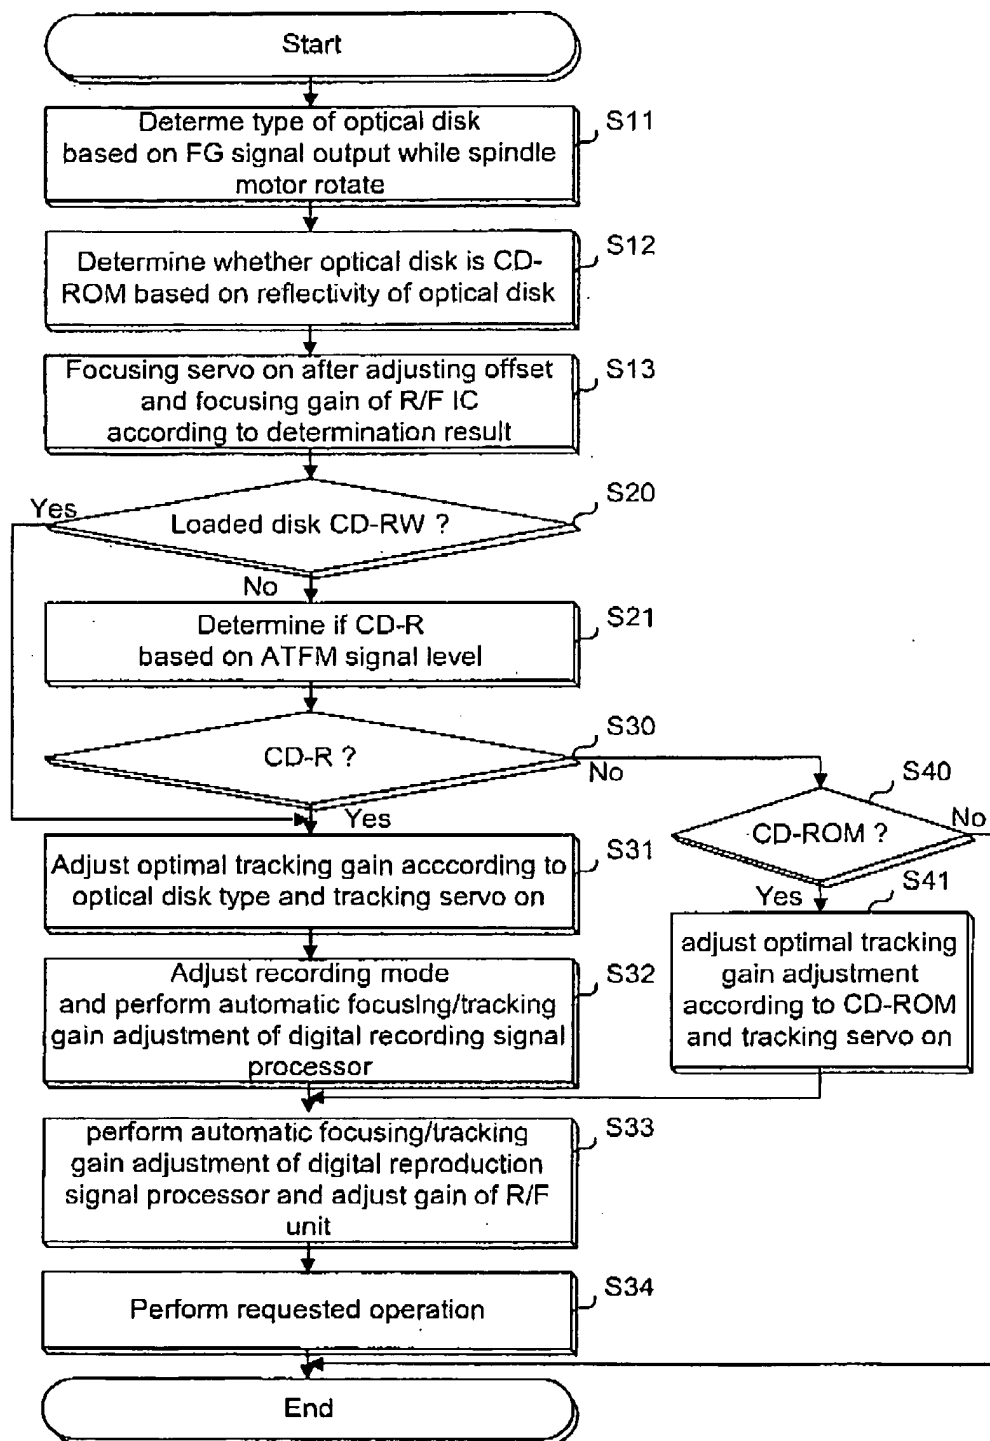
KR10-2003-0006937

**FIG. 1**

KR10-2003-0006937

**FIG. 2**

KR10-2003-0006937

**FIG. 3**



KR10-2003-0006937

FIG. 4

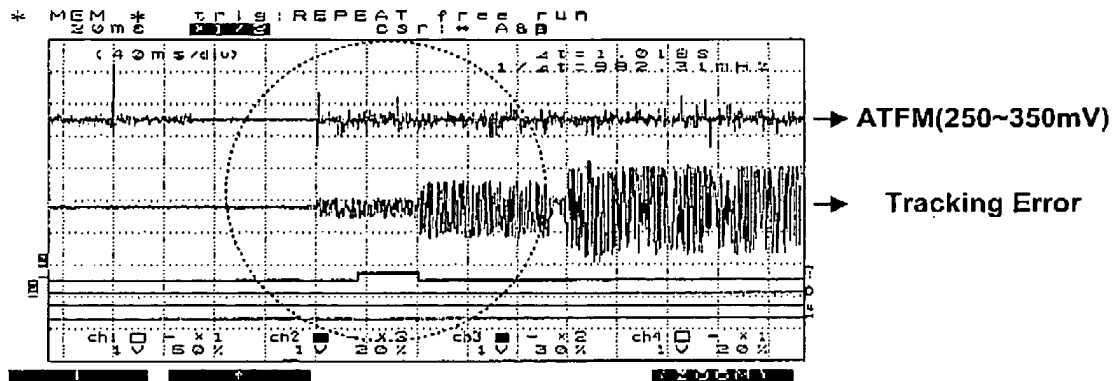


FIG. 5

